



IES3016 Series

DIN-Rail Mounting

16-port 100M Layer 2 Unmanaged Industrial Ethernet Switch

- Support 8 100M copper ports, 8 100M fiber and copper ports optional
- Support dual power supply input, input voltage: 12~48VDC
- Support -40~75°C wide operating temperature range




Introduction

IES3016 series are 16-port 100M layer 2 unmanaged industrial Ethernet switches. This series include five types of products and provide 100M copper ports, 100M fiber ports. It adopts DIN-Rail mounting to meet the requirements of different application scenes.

Power supply input is two independent power supply circuits, which can ensure the device normal operation when one of the power supplies breaks down. DIP switch can achieve power supply alarm, flow control and storm suppression. When power supply occurs link failure, ALARM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.

Dimension

Unit:mm

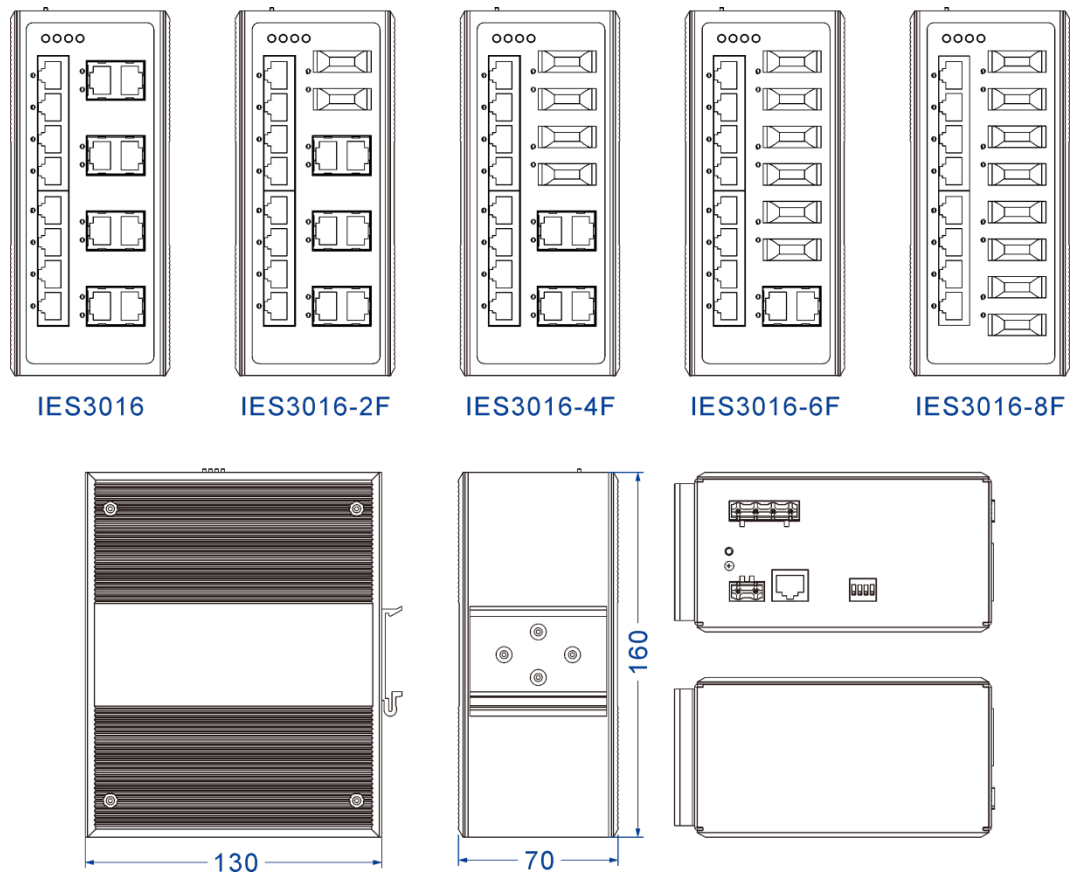

Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3x for Flow Control																		
Interface	Copper port: 10/100Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning Fiber port: 100Base-FX, SC/ST/FC optional Alarm port: 2-pin 7.62mm pitch terminal blocks, support 1 relay alarm output, current carrying capacity 5A@30VDC or 10A@125VAC																		
LED Indicator	Running Indicator, Port Indicator, Power Supply Indicator, Alarm Indicator																		
Switch Property	Transmission mode: store and forward MAC address: 8K Packet buffer size: 3Mbit Backplane bandwidth: 12.8G Switch time delay: < 10μs																		
Power Requirement	12~48VDC, 4-pin 7.62mm pitch terminal blocks Dual power supply redundancy, reverse polarity protection, nonpolarity Support 4A overcurrent protection																		
Power Consumption	<table border="1"> <thead> <tr> <th>Model</th> <th>No-load (@24VDC)</th> <th>Full-load (@24VDC)</th> </tr> </thead> <tbody> <tr> <td>IES3016</td> <td>4.82W</td> <td>7.30W</td> </tr> <tr> <td>IES3016-2F</td> <td>6.12W</td> <td>8.33W</td> </tr> <tr> <td>IES3016-4F</td> <td>7.66W</td> <td>9.29W</td> </tr> <tr> <td>IES3016-6F</td> <td>8.78W</td> <td>10.49W</td> </tr> <tr> <td>IES3016-8F</td> <td>10.18W</td> <td>12.26W</td> </tr> </tbody> </table>	Model	No-load (@24VDC)	Full-load (@24VDC)	IES3016	4.82W	7.30W	IES3016-2F	6.12W	8.33W	IES3016-4F	7.66W	9.29W	IES3016-6F	8.78W	10.49W	IES3016-8F	10.18W	12.26W
Model	No-load (@24VDC)	Full-load (@24VDC)																	
IES3016	4.82W	7.30W																	
IES3016-2F	6.12W	8.33W																	
IES3016-4F	7.66W	9.29W																	
IES3016-6F	8.78W	10.49W																	
IES3016-8F	10.18W	12.26W																	
Environmental Limit	Operating temperature range: -40~75°C Storage temperature range: -40~85°C Relative humidity: 5% ~ 95% (no condensation)																		
Physical Characteristic	Housing: IP40 protection, metal Installation: DIN-Rail mounting Dimension (W x H x D): 70mm×160mm×130mm																		
Industrial Standard	IEC 61000-4-2 (ESD), Level 4 <ul style="list-style-type: none"> Air discharge: ±15kV Contact discharge: ±8kV IEC 61000-4-4 (EFT), Level 4 <ul style="list-style-type: none"> Power supply: ±4kV 																		

	<ul style="list-style-type: none">● Ethernet interface: $\pm 2\text{kV}$● Relay: $\pm 4\text{kV}$ <p>IEC 61000-4-5 (Surge), Level 3</p> <ul style="list-style-type: none">● Power supply: common mode $\pm 2\text{kV}$, differential mode $\pm 1\text{kV}$● Ethernet interface: $\pm 2\text{kV}$● Relay: common mode $\pm 2\text{kV}$, differential mode $\pm 1\text{kV}$ <p>Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6</p>
Certification	CE, FCC, RoHS
Warranty	5 years



Ordering Information

Available Models	100M Fiber Port	100M Copper Port	Power Supply Range
IES3016	-	16	12~48VDC dual power supply
IES3016-2F	2	14	
IES3016-4F	4	12	
IES3016-6F	6	10	
IES3016-8F	8	8	



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.