



TTL-485-5P

RS-485 to 5V TTL Converter (DB9)

Introduction:

The 3onedata TTL-485-5P is a bi-directional port powered RS-485 to 5V TTL converter in a 9 pin format. It can convert any standard full duplex RS-485 port to a 5V TTL signal and vice versa. The unit is powered from the RS-485 data lines. It also supports data direction auto-turnaround. Therefore, no external power or flow control is required. The data direction auto-turnaround automatically enables the TTL driver when data is present on the RS-485 side making the device plug-and-play, requiring no software drivers. The TTL-485-5P has a DB9 male connector on the RS485 side or 5-way terminal block and either a DB9 male connector or 5-way terminal block on the TTL side. Separate terminal block is included in package.

Packing List:

TTL-485-5P is shipped with following items.


1. TTL-485-5P × 1
2. Separate terminal block(DB9F to 5 bit) × 2
3. User manual × 1

Features:

1. Port Powered: no external power is necessary
2. Data Direction, auto-turnaround, no flow control is necessary
3. Plug-and-Play (Device is hot-pluggable)
4. Built-in surge protection, static protection and circuit protection

Pinout Configuration:

RS-485 port adopt DB9M or 5 bit terminal block, 5V TTL side adopt DB9M or 5 bit terminal block, no power supply Input.



DB9M (Male/needle)

RS-485 side:

Signal	GND	+5V	NC	D+	D-
Pin#	1	2	3	4	5
Function	GND	+5V	NC	D+	D-

5V TTL side:

Signal	GND	NC	TTL OUT	TTL IN	GND
Pin#	1	2	3	4	5
Function	GND	NC	TTL OUT	TTL IN	GND

Specifications:

Standards: EIA RS-485 standard

RS-485 signal: D+, D-, GND

TTL signal: IN, OUT, GND

Baud rate: 300~115200bps

Transfer distance: 5V TTL side: 3m

RS-485 side: 1.2Km

Connectors: RS-485 Side: DB9 Male or 5 Way Terminal Block

5V TTL Side: DB9 Male or 5 Way Terminal Block

Port protect: 600W surge protection, 15KV ESD protection

Power

Power: 5V external power

Environment

Operating temperature: -10°C to 60°C

Storage temperature: -40°C to 85°C

Humidity: 5% to 95%(no condensation)

Appearance

Dimensions: 62.8mm×33.8mm×17.8mm

99.8mm×34.1mm×17.6mm (with terminal block)

Weight: 24g (with terminal block: 50g)

Warranty: 5 years

Troubleshooting instructions:

Connect TTL-485-5P to RS-485 port. Tie signals TTL OUT to TTL IN of the TTL-485-5P. Using HyperTerminal type program send a character from one and see if it echoes to the other.

Applications:

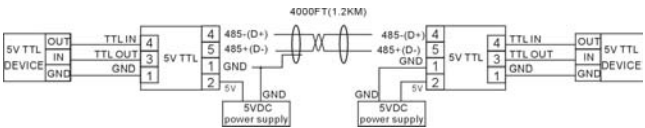


Figure 1: Extending TTL Data Distance

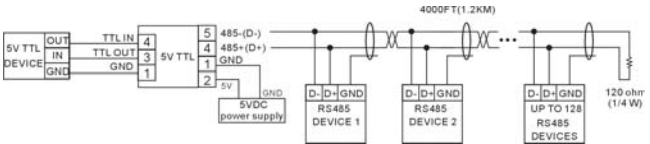


Figure 2: Master/Slave multiple drop configuration

Certifications:



3onedata

Shenzhen 3onedata Technology Co.,Ltd

Tel: +86-755-26702688 Fax: +86-755-26703485

www.3onedata.com