

IES3016G

16-port 10/100/1000BaseT(x) Ethernet

Unmanaged Industrial Ethernet Switch

Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.3ab
- Support 16 10/100/1000Base-T(x) RJ45 Ethernet ports
- Support MAC address auto-learning, auto-aging
- Support 10K MAC address
- Support 56Gbps backboard bandwidth
- Support redundancy DC power supply 48VDC
- Industrial grade 4 design, -40-75°C work temperature
- IP40 protection grade, DIN-Rail mounting




Introduction

IES3016G is an industrial grade, unmanaged Ethernet switch which supports 16 Gigabit Ethernet Ports. Standard Industry design, can satisfied every requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided wide voltage power supply input.

Product accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 channel DC power input and -40~75°C working temperature, can meet all kinds of Industrial environment requirement and provide the solution of the economy.

Dimension

Unit (mm)

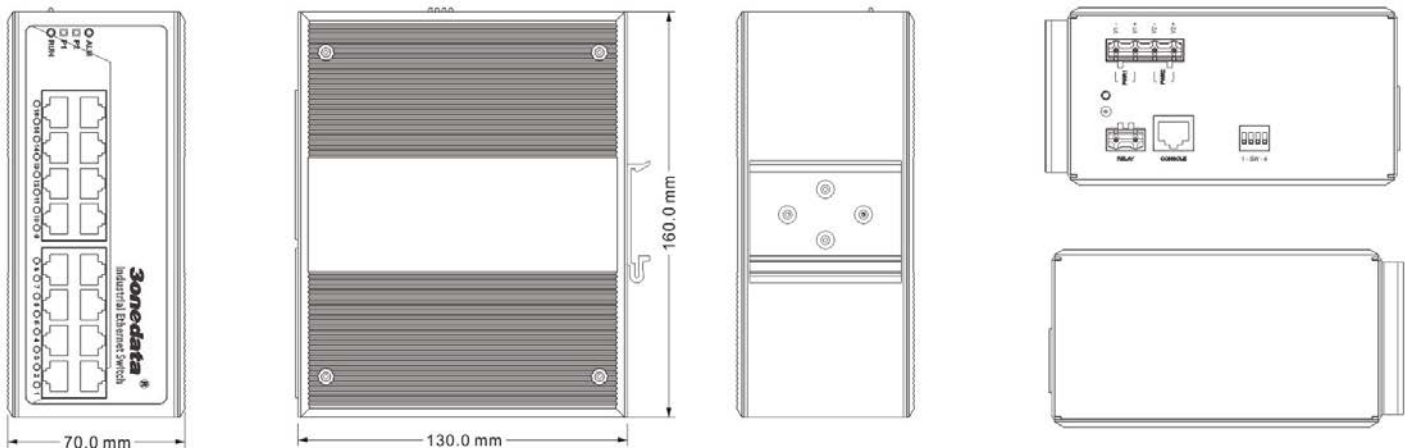

Specification

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3ab
 Flow control: IEEE802.3x flow control, back press flow control

Exchange attribute

100M forward speed: 148810pps
 1000M forward speed: 1488100pps



Transmit mode: store and forward

System exchange bandwidth: 56G

MAC address table: 10K

Memory: 12M

Interface

Gigabit RJ45 port: 10Base-T/100Base-TX/1000Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

Console port: Retain

Alarm port: 2 bit terminal block
1 channel relay alarm output

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

LED indicator

Run indicator: RUN

Interface indicator: Link (G1~G16)

Power supply indicator: P1, P2

Alarm indicator: ALARM

Power supply

Input Voltage: 48VDC

Type of input: 4 bits terminal block

DC support reverse connection

DC support redundant power supply

Consumption

No-load consumption: 11.04W@48VDC

Full-load consumption: 12.88W@48VDC

Working environment

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95 % (no condensation)

Mechanical Structure

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail mounts

Weight: 1080g

Size (W×H×D): 70mm×160mm×130mm

Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 3

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 3

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certification

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years

Packing List

- 1. Industrial Ethernet Switch ×1
- 2. User manual × 1
- 3. Certificate of quality × 1
- 4. Warranty card × 1