

IES618-4F-4D(RS-485)-P(12-48VDC)

4 port 10/100 Base-TX+4 port 100M fiber +4 port RS-485/422 managed Industrial Ethernet switch

Features

- ◎ Support 4 port 10/100Base-TX+ 4 port 100M fiber+ 4 port RS-485/422
- ◎ Support SW-Ring™ redundant network patent technology(Faulty recovery time<20ms)
- ◎ Support IEEE802.1Q VLAN configuration, Control broadcast storm effectively
- ◎ Support port bandwidth limited function, optimize bandwidth utilize
- ◎ Support IEEE802.1p, QOS
- ◎ Support RSTP
- ◎ Support SNMP
- ◎ Support based on socket application access
- ◎ Support Sever, Client, UDP based mode and Sever, UDP advanced mode
- ◎ Support Windows serial driver procedure mode
- ◎ Support TCP, UDP, ARP, ICMP and DHCP protocol
- ◎ Support cross-gateway and cross-router communication
- ◎ Specific serial self-adapt function (Realcom)
- ◎ Support Web, CLI, Telnet management
- ◎ Support 2K MAC address table
- ◎ Support 2 power supply input and 1 relay alarm output
- ◎ Support port line and redundant network faulty/unusual, local and remote alarm
- ◎ Support IGMP snooping, static multicast filter, port trunking and port mirroring
- ◎ High strength iron shell, IP40 protection
- ◎ Industrial 4 class design
- ◎ Redundant 24VDC power supply input(12~48VDC)
- ◎ -40~75°C working temperature
- ◎ DIN-rail, wall mounting installation



Introduction

IES618-4F-4D (RS-485) -P(12/48VDC) is a industrial, management, redundant industrial Ethernet switch and integrate 4 port RS-485/422 serial device server, it support 4 port 10/100M Ethernet(RJ45), 4 port 100M fiber, 4 port RS-485/422, 2 redundant 12~48VDC power input and 1 relay alarm output, it adopt SW-Ring redundant technology (Recovery time<20ms), users can set the redundant easily to increase network reliability, furthermore, it can also support numerous intelligent network management functions, like as IGMP, RSTP,

802.1Q VLAN, QOS, port trunking and port mirroring etc, It adopted no fan, low power consumption design, IP40, corrugate high strength iron shell, the performance is more steadily. It accorded with CE, FCC standard and Industrial 4 class, DIN rail installation and wide operating temperature (-40~75°C), it can satisfied some kinds of industrial environment, it can provide reliable and quickly solution for your Ethernet device.



Specification

Technology

Standard: IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W
Protocol: ARP, ICMP, TCP, UDP, DHCP, DNS, HTTP, Telnet, SW-RingTM
Flow control: IEEE802.3x, back pressure control

Function

Function: SW-RingTM, QOS, 802.1Q VLAN, port-trunking, static multicast filter, port mirroring, Broadcast storm control, flow statistics, upgrade online, up and download configuration file
SW-RingTM: Single, Couple, Chain, Dual homing ring.
Serial device server: 4 port serial device sever, each port support 4pcs TCP or UDP session connection

Interface

100M Ethernet: 10/100Base-TX self-adapt RJ45 port.
100M fiber port: 100Base-FX (SC/ST/FC)
Console port: Procedure debug (RS-232), RJ45
Alarm port: 2 bit 7.62mm terminal block,
1 channel relay alarm output

Serial

RS-422 signal: T+, T-, R+, R-, GND
RS-485 signal: D+, D-, GND
Parity: None,Even,Odd,Space,Mark
Data bit: 5bit,6bit,7bit,8bit
Band rate; 300~115200bps
Direction control: RS485 side adopt ADDC technology, auto detect and control data transfer direction
Loading: RS-485/422 side support 32 nodes loop back
Protection: 2KV isolation, 15KV static protection.
Connector: 5 bit terminal block

Transfer distance

Twisted cable: 100m(CAT5/CAT5e)
Multi mode fiber: 1310nm,2Km
Single mode fiber: 1310nm, 20K, 1310nm, 40Km
1310nm, 60K, 1550nm, 80Km
RS-485/422: 1200m

Exchange attribute:

100M transmit speed: 148810pps
Transfer: Store and forward
System exchange bandwidth: 2.0 G
Buffer memory: 1MKbit

Support 2K MAC address table

LED indicator

Power supply indicator: PWR
Alarm indicator: Alarm
System indicator: Run
Ethernet port indicator: Link/Act (1-8)
Serial port indicator: TX(1-4), RX(1-4)

Power supply

Input voltage: 24VDC(12~48VDC)
Terminal block: 4 bits 7.62mm terminal block
None load consumption: 4.8W@24VDC
Full load consumption: 6.9W@24VDC
Support inside over-current 4.0A protection
Support opposite connection protection

Mechanical

Shell: IP40, high strength iron shell.
Installation: DIN Rail
Dimension (W×H×D: 160 mm×70mm×130mm
Weight: 1021g

Environmental

Operating Temperature: -45°C to 75°C
Storage Temperature: -45°C to 85°C
Relative Humidity: 10 to 95% (non-condensing)

Standard

EMI: FCC Part 15, CISPR (EN55022) class A
EMS: EN61000-4-2 (ESD), Level 4
EN61000-4-3(RS), Level 3
EN61000-4-4 (EFT), Level 4
EN61000-4-5 (Surge), Level 4
EN61000-4-6(CS), Level 3
EN61000-4-8(PFM), Level 5
Shock: IEC 60068-2-27
Free fall: IEC 60068-2-32
Vibration: IEC 60068-2-6

Warranty


Warranty time: 5 years

Certification

CE, FCC, RoHS, UL508(Pending)

Dimension and appearance

Unit (mm)

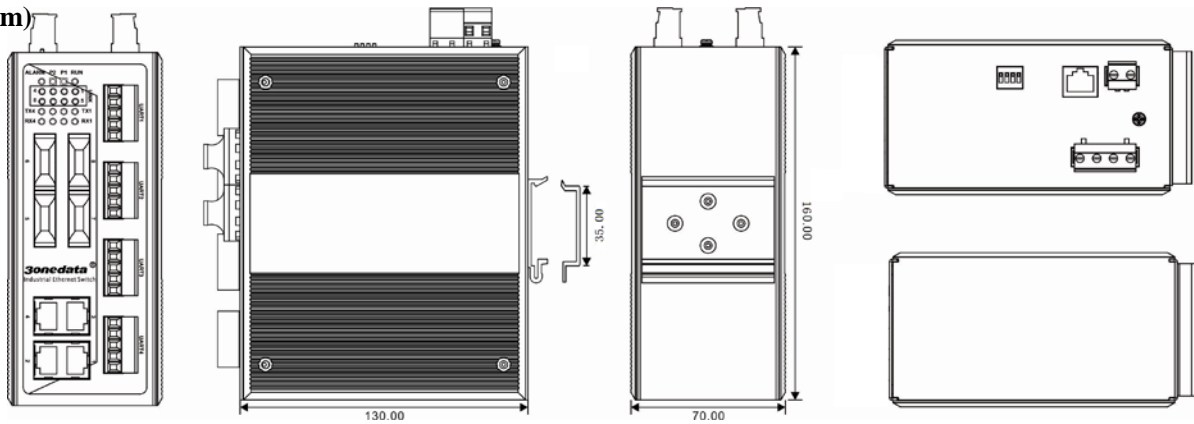

Ordering information

Option model	Port				Power supply
	100M Ethernet	100M fiber (SC/ST/FC) SM or MM	Serial port		
			RS-232	RS-485/RS-422	
Standard model					12~48VDC
IES618-4F-4D(RS-485)-P(12/48VDC)	4	4	—	4	
IES618-4F-4D(RS-232)-P(12/48VDC)	4	4	4	—	
IES618-2F-4D(RS-232)-P(12/48VDC)	6	2	4	—	
IES618-2F-4D(RS-485)-P(12/48VDC)	6	2	—	4	
IES618-4D(RS-485)-P(12/48VDC)	8	—	—	4	
IES618-4D(RS-232)-P(12/48VDC)	8	—	4	—	