

IES5028G Series

16-port 10/100/1000BaseT(x) + 8-port Gigabit Combo+4-port 1000Base-X SFP

Layer 2 Managed Industrial Ethernet Switch

Features

1. Support 16-port 10/100/1000BaseT(x), 8-port Gigabit combo and 4-port 1000Base-X SFP
2. Support IGMP Snooping and GMRP filter multicast packet
3. Support QOS of IEEE 802.1p/1Q TOS/DiffServ to promote network stability
4. Support SNMP v1/v2/v3
5. Support IEEE802.1X, HTTPS, and SSH to enhance network security
6. Support link static / dynamic aggregation to optimize bandwidth
7. Support ACL function to enhance flexibility and security of network management
8. Support bandwidth management, ensuring network stability
9. Support RMON, effectively improve network monitoring and predictive ability
10. Support port mirroring for online debugging
11. Support STP/RSTP/MSTP to enhance network stability
12. Support IEEE802.1Q VLAN for easy network planning
13. Working temperature: -40°C-75°C
14. Support two 100VAC~240VAC power inputs
15. Support two power supplies for redundancy and high reliability
16. Support two relay alarms to enhance reliability
17. No fan design, industrial and rack-mounted installation



Introduction

IES5028G series are high-performance, cost-effective smart rack-mounted industrial layer 2 switches. They are equipped with 16*10/100/1000BaseT(x) Ethernet ports, 8 Gigabit combo ports and 4*1000Base-X SFP ports. The increase in bandwidth elevates the data transmission capability, and it's very suitable for the application of large-scale industrial network.

IES5028G-4GS-8GC-16GT supports IPv4 platform, and various advanced administration functions such as IGMP, GMRP, DHCP Server/Client, STP/RSTP/MSTP, QOS, port mirroring, LLDP etc. This series of products also support SNMPv1/v2/v3 (Simple Network Management Protocol), CLI, Web Management, TELNET

management for more convenient device management. Combined with enhanced ACL control and anti-attack function, the management will be more secure.

IES5028G-4GS-8GC-16GT is in compliance with the FCC and CE standards, and supports 2-way redundant AC inputs and 2-way relay fault alarm output. Users can select flexibly according to actual environment. It adopts industrial no fan design, and is fit for severe industrial environment at a working temperature of -40°C-75°C, which can meet various industrial application requirements and provide reliable and economic solutions for Ethernet access.

Specification

Technology

Standard: IEEE802.3, IEEE802.3u, IEEE802.3z/ab, IEEE802.3x, IEEE802.1d, IEEE802.1w, IEEE802.1s, IEEE802.1q, IEEE802.1p, IEEE802.1x, IEEE802.3ad

Flow control: IEEE802.3x flow control, Back Pressure flow control

Protocol

ARP、ICMP、TCP、UDP、DHCP、DNS、HTTP、Telnet、RSTP、MSTP、LLDP、LACP、IGMP、GMRP、SNMP

Interface

RJ45 port: 10/100/1000BaseT(X), flow control, full / half duplex, adaptive work mode, MDI/MDI-X adaptive

Combo port: 1000Base-X SFP slot or 10/100/1000Base-T(X) RJ45

SFP port: 1000Base-X SFP slot (LC)
 Console port: CONSOLE Admin Port (RJ45)
 Alarm port: 5-core 5.08mm wiring terminal (R+/R-),
 2-way relay alarm output

Transmission distance

Twisted-pair: 100m (standard CAT5/CAT5e cable)
 Multi-mode fiber: 1310nm, 2km
 Single mode fiber: 1310nm, 20/40Km
 1550nm, 60/80/100/120Km

LED indicator

Power indicator: P1/P2
 Alarm indicator: ALM
 Operation indicator: RUN
 Port connection / operation status indicator: Link/ACT (1~28)

Switch attribute:

Transmission mode: store-and-forward
 MAC address: 16K
 Cache: 12Mb
 Switched Bandwidth: 56G
 100M forwarding rate: 148810pps
 1000M forwarding rate: 1488100pps

Power Supply

AC input voltage: 100VAC~240VAC
 AC input terminal: three-phase socket with rocker switch
 Support 2-way AC input

Consumption

No-load consumption: 20.3W@220VAC
 Full-load consumption: 25W@220VAC

Mechanical characteristics

Shell: IP30 protection, metal shell
 Installation: 19" rack-mounted
 Weight: 3.9kg
 Dimension (L*W*H): 440mm×285mm×43mm

Working environment

Working temperature: -40℃~75℃
 Storage temperature: -40℃~85℃
 Humidity: 5%~95% (no condensation)


Certification

Security: UL508 (pending)
 EMS: EN61000-4-2 (ESD), Level 4
 EN61000-4-4 (EFT), Level 4
 EN61000-4-5 (Surge), Level 4

Warranty: 5 years

Dimension

Unit (mm)

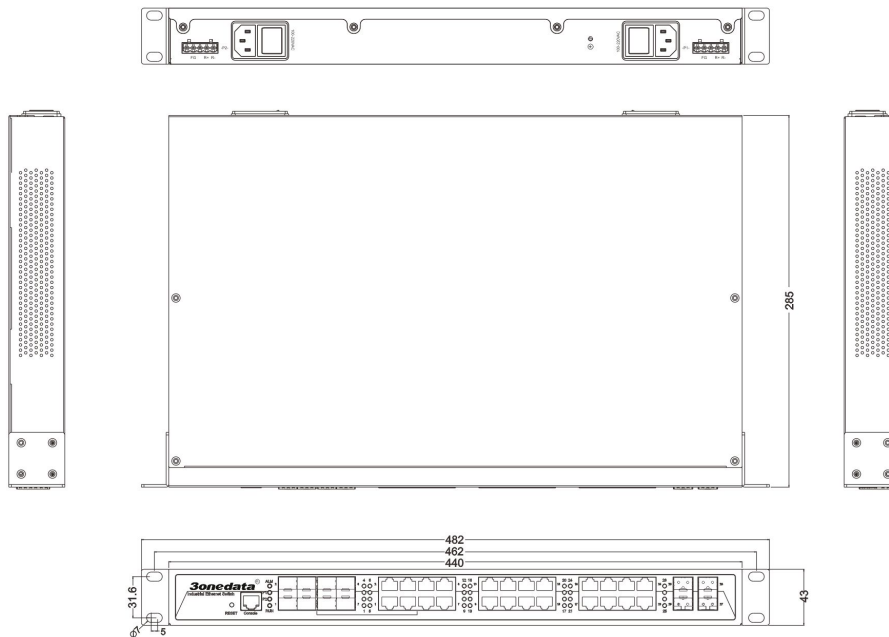

Ordering Information

IES5028G-4GS-8GC-16GT: 4-port 1000Base-X SFP + 8-port Gigabit Combo +16-port 10/100/1000Base-T(X), 2P (100-240VAC)



Packing List

1. Industrial Ethernet switch IES5028G-8GC-4GS (plus terminal block) ×1
2. CD × 1
3. User manual × 1
4. Certificate of quality × 1
5. Warranty card × 1
6. Power cable × 2
7. Rackmount ears × 2