

MODEL7301

E1 Optic Fiber Modem

Features

- Conforms to all relevant ITU series standards (ITU-T G.703 G.704 G.823)
- Framing or non-framing mode in option
- E1 time slot in arbitrary option
- Balanced 120Ω/non-balanced 75Ω interfaces automatic
- Support the loop back of local analog/digital interface
- Support remote loop back function (valid on under framing mode)
- Support pseudo-random code test function, providing convenience for the test of optic fiber line status 120km trunking -free transmission distance for single-mode optic fiber
- Capable to be communicated with V.35 fiber modem
- Available with complete line detection and alarm indications
- Available with independent structure and 19-inch frame-mounted structure (frame-mounted structure can be inserted with 16 modules);
- AC 220V and DC -48V inputs may be selected for fiber optic modems of both structures;
- For frame-mounted fiber optic modems, dual power supply heat backup is provided to ensure a Receiving level: 0~-43db



Introduction

MODEL7301 E1 Fiber Modem is a high-performance E1 fiber optic modem developed by using a dedicated integrated circuit. It is to modulate a framing or non-framing E1 data signal directly into single- or multi-mode optic fiber for a transmission via optic cable line. At another end of the optic cable, optical signal is demodulated

into a framing or non-framing E1 data signal. E1 interface may be directly connected with the E1 interfaces of image and data terminals or the WAN ports of MUX, exchanger and router for a dedicated network setup or a LAN connection.

Specification

Optic interface:

Line mode type: CMI
 Line mode rate: 2.048Mbps
 Operating wavelength: 850nm,1310nm or 1550nm
 Optic fiber connector: SC/PC
 Applicable optic fiber: multi-mode, single-mode
 Transmission distance: Single-mode: up to 120km
 Multi-mode: up to 2km

E1 interface:

Standard: ITU-T G.703 G.704
 Frame structure: framing CCS(PCM31)/ CAS(PCM30)
 Rate: 2.048Mbps
 Impedance: 75Ω, physical interface BNC;
 120Ω, physical interface RJ45
 Code:HDB3

Receiving level: 0~-43db

Indicator lamps:

To indicate the operating status of power supply, loopback and random code test, code missing alarm, out-of-frame alarm etc.

Structure:

Independent: 140mm(depth) × 210mm(width) x 42mm(height)
 Frame-mounted: 19in 4.5U standard casing

Power supply:

Independent: 85V~264V AC input, 5V/2A output;
 -36V~-72V DC input, 5V/2A output
 Frame-mounted: 150V~260V AC input, 5V/16A, 12V/1A output
 -38V~-58V DC input, 5V/16A, 12V/1A output

Power consumption: 3W

Operating temperature: 0°C~50°C


Storage temperature: -20°C~80°C

Humidity: 5%~90% (free of condensate)

Approvals: FCC, CE, RoHS approvals

Warranty: 3 years

Dimension

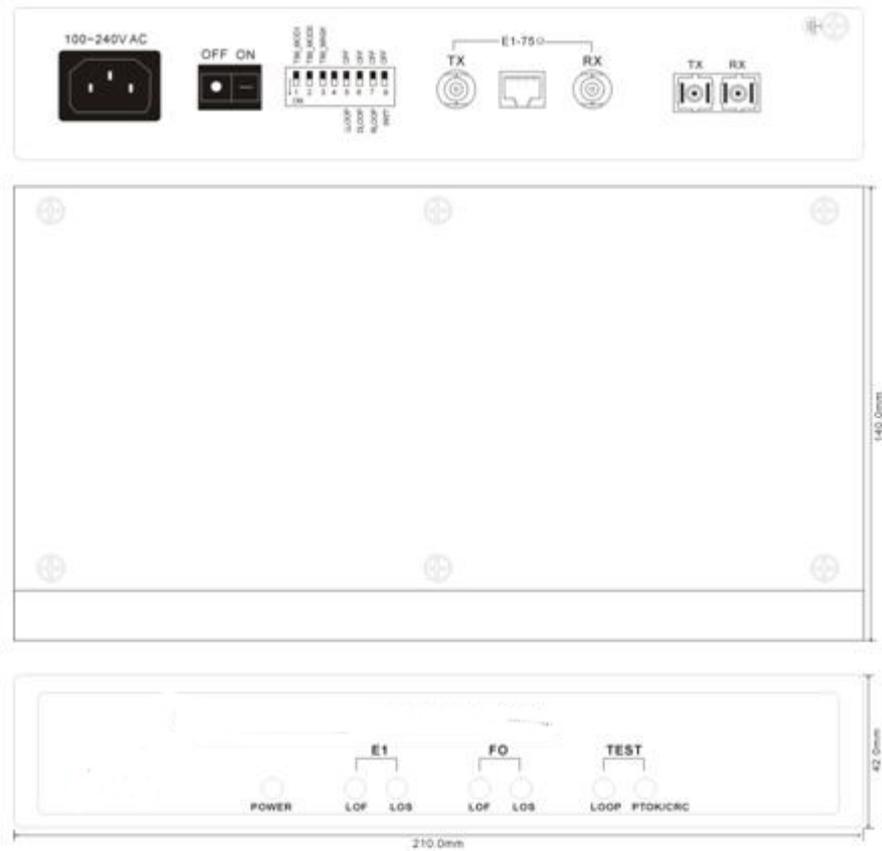

Packing List

1. MODEL7301 E1 Fiber Modem ×1
2. E1 Fiber Modem Operation Manual ×1
3. Power line(E1 Fiber Modem/AC)×1
4. A couple of BNC connectors