



Model277

RS-232/485/422 to Fiber Converter (SM & MM)

Introduction:

Model277 is one kind can offer RS-232/485/422 serial port carry transparent optic fiber modem of transmission to get end to user, no need patch cords set up, switch over automatically, and can detect and examine the signal speed automatically, zero delays time to transmit automatically. Model277 adopt optic fiber transmit, have isolate protection, data privacy is fine, working steady, data, such threats to communication equipment as the wave is welled up and interfered with electromagnetically that the effective one has prevented the abominable environment from being struck by lightning, can work in the abominable and dangerous environment reliably.

Can be used in occasions such as various industrial control, course controlling, traffic controlling and intellectual district , especially suit the bank, electricity and interfering with environment department and system with the special requirement electromagnetically.

Packing List:

Model277 is shipped with following items.

1. Model277 × 1
2. User manual × 1

Features:

1. Extend RS232/485/422 transmission
up to 120km with single-mode(SM)
up to 2km with multi-mode(MM)
2. Transmit asynchronously, point-to-point to use, speed reach 500Kbps
3. 600W surge protection, 1500W surge protection
4. Examine signal speed automatically, zero delay time

5. Plug-and-Play (Device is hot-pluggable, Data format Auto-sensing & Self-adjusting)
6. Only one RS232/RS485/RS422 port can be connected at a given time.
7. 9~36VDC power supply Input(2 bit terminal block)

Pinout Configuration:

Power, RS-232/485/422

RS-232/485/422 interface adopt 8 bit terminal block, the power supply input is 2 bit terminal block.



Power:

DCIN 9~36VDC input

GND power ground

RS-485/422:

T+/D+ RS-422 send+/485+(A)

T-/D- RS-422 send-/485-(B)

R+ RS-422 receive+

R- RS-422 receive-

GND Signal ground


RS-232:

GND Signal ground

IN RS232 input (RXD)


OUT RS232 output (TXD)

Optical fiber interface

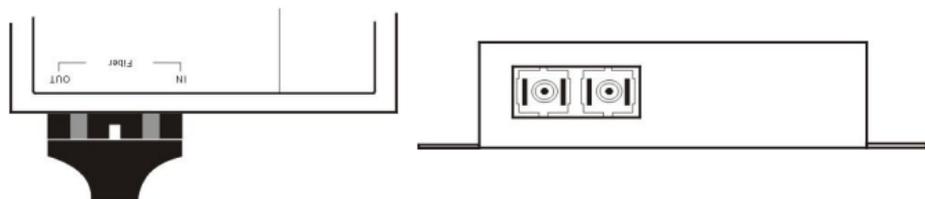

Optic fiber interface need use in pairs, OUT port is fiber send side, connect another long-range light of interface fiber receive end IN ; IN port is fiber receive side , connect long-range same fiber send side :

Optic fibers spent both ends mark the label (the following picture show: A-A, B-B, can also mark another: A1-A2, B1-B2), in order to use.

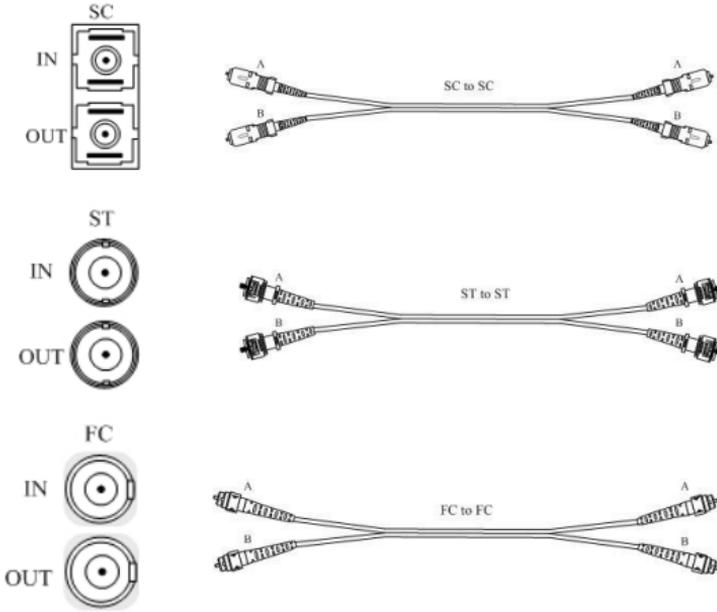

NOTE: SC, ST or FC, for optic fiber interface, SM is look the same to MM for form. For example, Model277SM/SC, the optic fiber interface(SC) is look the same to Model277MM/SC.

LED indications:

Power	Green, Power supply indication On: power joined; Off: no power connect
RxD	Green light, optic fiber interface receive data point out and concurrently mere port report an emergency and ask for help or increased vigilance, on: There are data that are received; Off: Have data receive
TxD	Green light, optic fiber interface send datum instruct On: Have data send; Off: no data send

Specifications:

Standards: EIA RS-232C, RS-485, RS422 standard

Transfer rate: 300~500Kbps, auto test serial signal rate detect signal speed automatically, zero delay time,

Transfer distance: RS-485/422 side: 1.2Km(9600bps)

RS-232 side: no less than 5m

Fiber optic:20,25,40,60,80,100,120km(SM),

2,5 km(MM) optional

Max number of drops:RS385/422: 128drops

Fiber connector: 2 × SC, 2 × ST, 2 × FC optional

Wavelength:1310nm

Fiber optic cables:Single Mode:8.3/125,8.7/125,9/125 or 10/125 um

Muti-Mode:50/125,62.5/125 or 100/125 um

600W surge protection;1500W static protection

Power input: +9V~36VDC power supply input(2 bit terminal block)

Dimensions: 100.0mm × 69mm × 22.0mm

Operating temp: -25°C to70°C

Storage temperature: -40 to 85°C

Operating humidity: 5% to 95%(no condensation)

Warranty: 5 years

Approvals: FCC,CE,RoHS approvals

Applications:

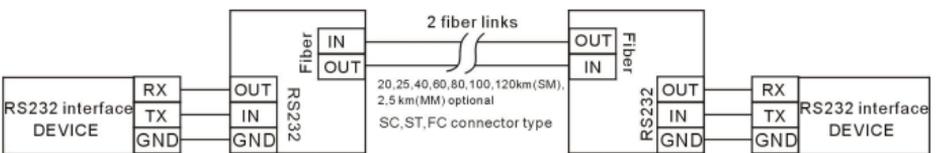


Figure 1: Extending the RS232 data distance

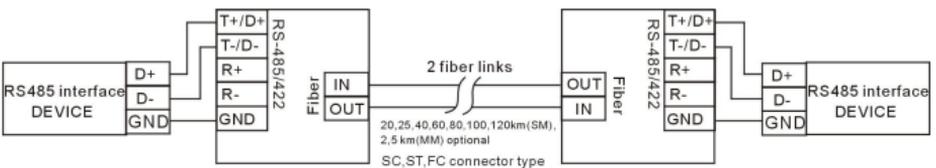


Figure 2: Extending the RS485 data distance


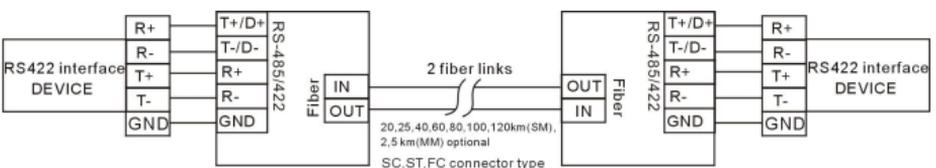


Figure 3: Extending the RS422 data distance


Installation:

Model277 provides DIN-rail and wall mounting two types of installation.

Wall mounting installation

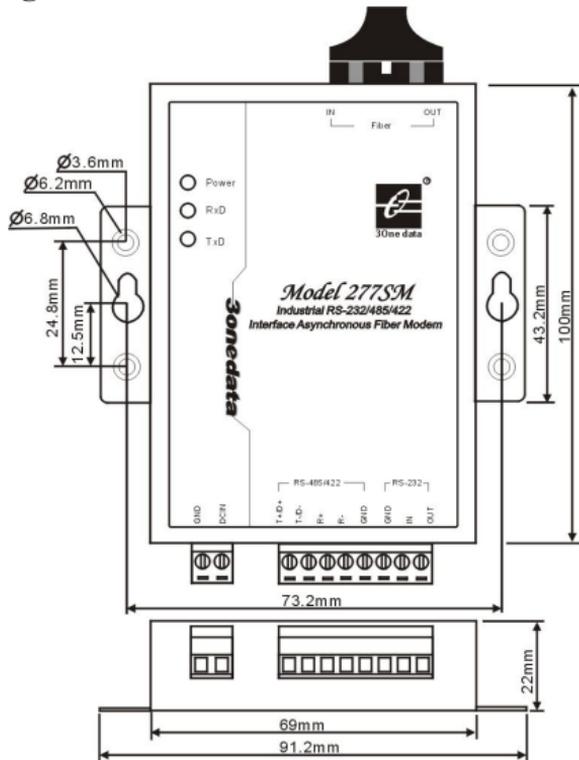

DIN-Rail Installation

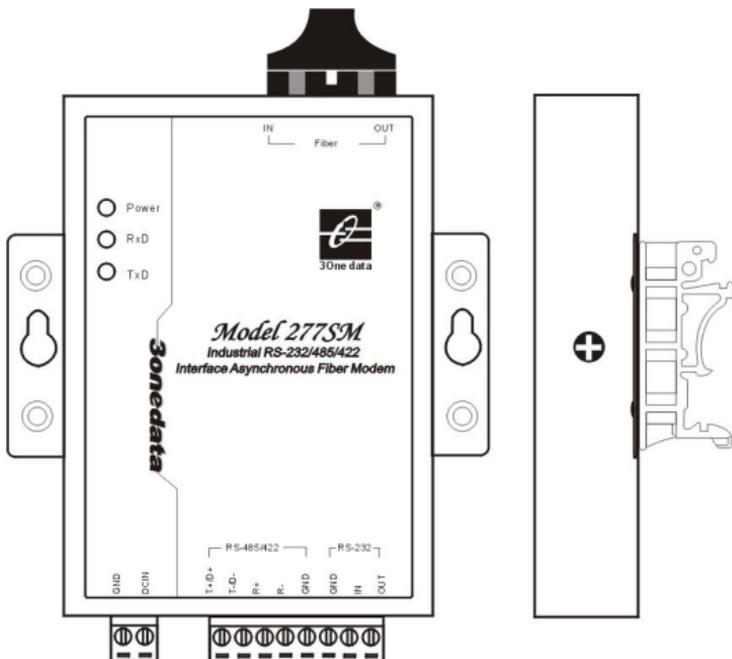

Troubleshooting instructions:

1. Electric port and optic port inconnection, insert the power supply, PWR light, RXD light.
2. Use optic fiber short the optic port IN and OUT, RXD OFF.
3. If the up stream port is RS-232, connect the up stream port to PC RS-232 port correctly, Using “Start” → “accessory”

→ “communication”, open the typical terminal, choose the correct COM port and 9600bps speed, shorting the optic IN and Out, input character in the typical terminal window, you will see the data indicate, if you don't see the data indicate, the product is failure.

Model277 FAQ:

LED indicator OFF

1. Power supply insert incorrect
2. Choice incorrect power supply(9~36VDC)

LED indicator instruction

1. PWR ON: Product work normally
2. TXD indicator flash: optic port transfer data
3. RXD indicator flash: optic port receive data
4. RXDON: optic connection incorrect (electric port in connection, used to optic port alarm indicator)

Communication failure

1. Using incorrect power supply
2. Optic port or electric port connection incorrect.
3. Optic fiber port do not insulate to the equipment interface
4. The equipment come from different supplier
5. Single-mode optic fiber uses multi-mode equipment or multi-mode optic fiber uses single-mode equipment
6. The optic fiber connector is incorrect, high error code, attenuation large.

Certifications:



3onedata

Shenzhen 3onedata Technology Co.,Ltd

Tel: +86-755-26702688 Fax: +86-755-26703485

www.3onedata.com